



# AU25302WP

## 160 Litre Weatherproof Flammable Storage Cabinet



All Justrite Storage Cabinets are manufactured to comply fully with the relevant Australian Standards.

Powder Coat paint finish provides a superior high gloss finish which minimizes the effects of corrosion and humidity. The durable finish can withstand the abrasive type of abuse as other types of finishes.

Locking Mechanism, the three-point locking with fail safe closing mechanism. The locking bars are specially developed to avoid bending and distortion providing a distinct locking effect. The locking mechanism also has an option to padlock the cabinet as well.

All cabinets are fitted with self-closing sequential closing doors allowing the left door to close, followed by the right door. This then provides a seal around the doors.

Full length door piano hinge provides a durable sealed barrier to cabinets contents. Adjustable leveling feet at all four corners.

### PBA Safety Code – AU25302WP

Weatherproof Flammable Storage Cabinet

Complies with AS1940

160 Litre Maximum Capacity

Holds 6 x 20 Litre Drums

External Size:

1365mmH x 1100mmW x 465mmD

Internal Size:

990mmH x 1020mmW x 375mmD

Supplied with two shelves as standard.

Extra metal shelves may be added.

Product Code: AU25901

FM Approved

(Factory Mutual Insurance Endorsement)

Shelving design permits the ventilation throughout the cabinet and troughs in each shelf collect spills and direct these away from contaminating products stored on the lower shelves. Shelves are adjustable in increments of 76mm.

Each cabinet is provided standard with a 150mm deep fully sealed sump to contain spills or leaks within the cabinet.

Self-closing mechanism is housed in the roof of the cabinet. This provides additional area within the cabinet for storage and avoids damage and alignment disorder. The cabinet closure mechanism is easily adjusted by removal of the four self-tapping screws securing the roof.

Dual vents are provided with built in flash arresters. Where applicable hazardous vapours may be piped away.

Thermal Fusible Door Links included for holding doors open while loading and unloading. This link separates at a temperature of 74 degrees to allow doors to automatically close.


Double wall thermal barrier. 1.2mm steel thickness with 40mm air wall spacing.

Custom fitted with Slanted Weatherproof Roof, Stainless Steel Hinges and Forklift Tyne Pockets with 4 Anchor Points.


Most cabinets are available ex stock to meet your requirements.

10 Year Manufacturing Warranty




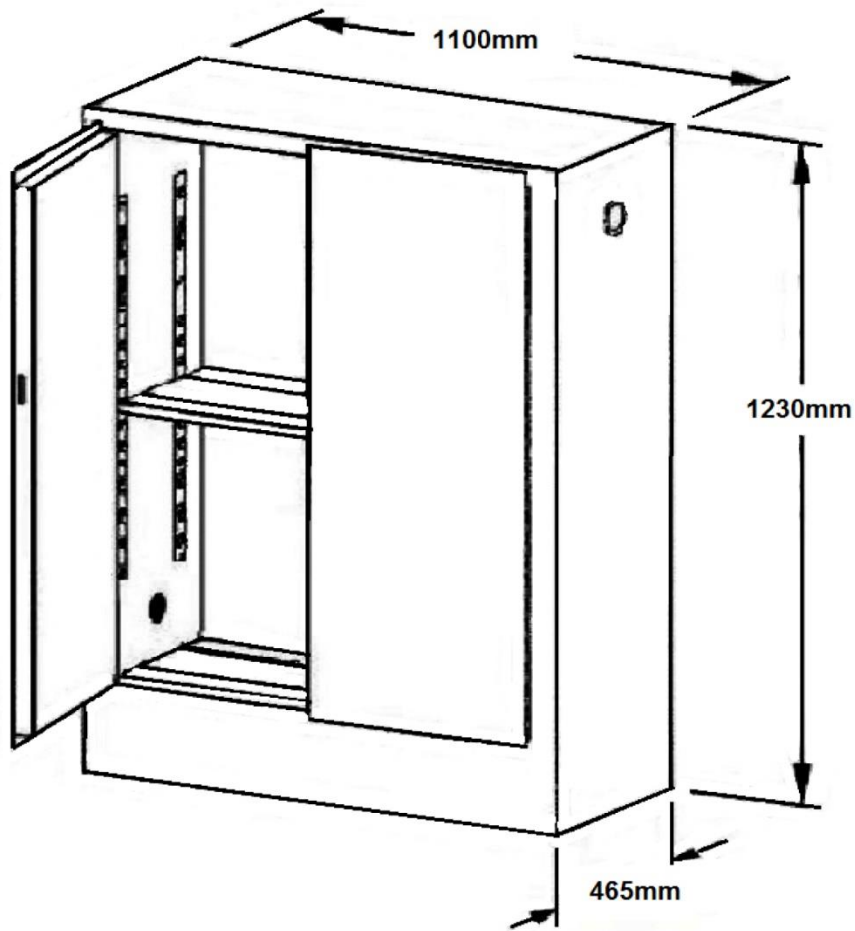

**Left Side Vent Position**

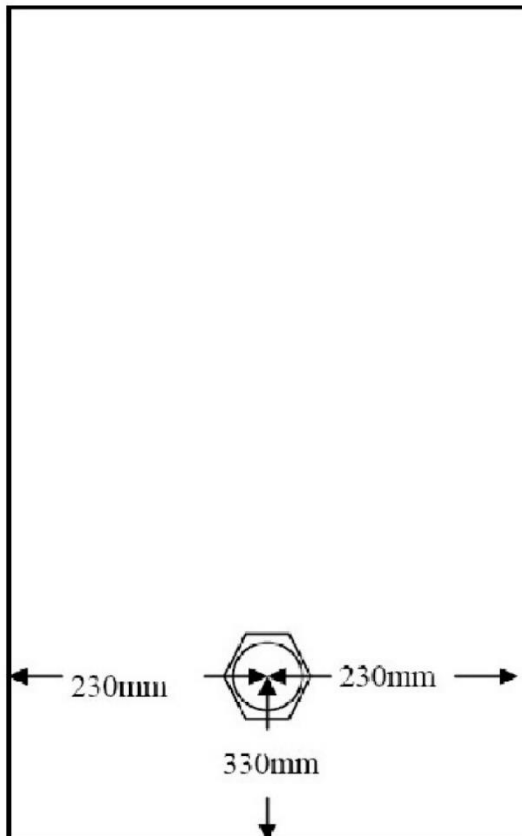

**Right Side Vent Position**

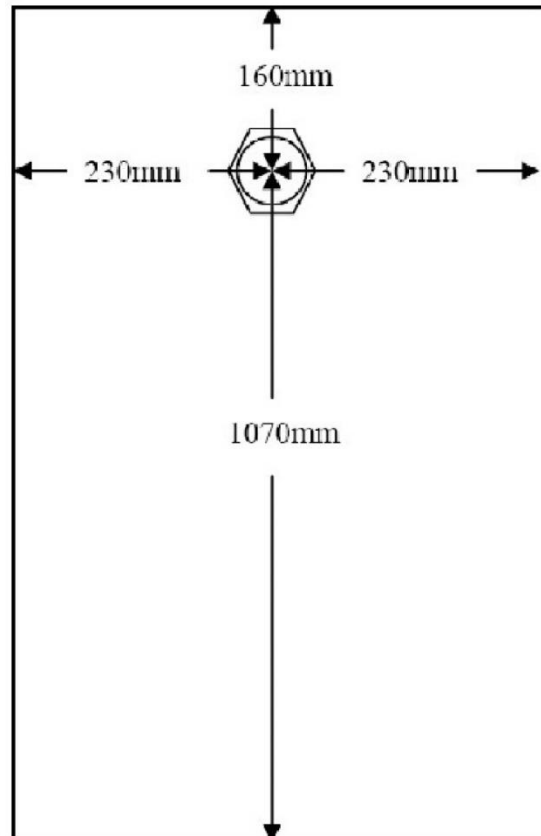

**Base of Cabinet Ground Level**