



# AU25748

## 100 Litre Flammable Liquids Storage Cabinet



### PBA Safety Code – AU25748

Flammable Liquids Storage Cabinet

Complies with AS1940

100 Litre Maximum Capacity

External Size:

800mmH x 920mmW x 565mmD

Internal Size:

560mmH x 830mmW x 480mmD

Supplied with two shelves as standard.

Extra metal shelves may be added.

Product Code: AU25915/37

FM Approved

(Factory Mutual Insurance Endorsement)

All Justrite Storage Cabinets are manufactured to comply fully with the relevant Australian Standards.

Powder Coat paint finish provides a superior high gloss finish which minimizes the effects of corrosion and humidity. The durable finish can withstand the abrasive type of abuse as other types of finishes.

Locking Mechanism, the three-point locking with fail safe closing mechanism. The locking bars are specially developed to avoid bending and distortion providing a distinct locking effect. The locking mechanism also has an option to padlock the cabinet as well.

All cabinets are fitted with self-closing sequential closing doors allowing the left door to close, followed by the right door. This then provides a seal around the doors.

Full length door piano hinge provides a durable sealed barrier to cabinets contents. Adjustable leveling feet at all four corners.

Shelving design permits the ventilation throughout the cabinet and troughs in each shelf collects spills and directs these away from contaminating products stored on the lower shelves. Shelves are adjustable in increments of 76mm.

Each cabinet is provided standard with a 150mm deep fully sealed sump to contain spills or leaks within the cabinet.

Self-closing mechanism is housed in the roof of the cabinet. This provides additional area within the cabinet for storage and avoids damage and alignment disorder. The cabinet closure mechanism is easily adjusted by removal of the four self-tapping screws securing the roof.

Dual vents are provided with built in flash arresters. Where applicable hazardous vapours may be piped away.

Thermal Fusible Door Links included for holding doors open while loading and unloading. This link separates at a temperature of 74 degrees to allow doors to automatically close.

Double wall thermal barrier. 1.2mm steel thickness with 40mm air wall spacing.



Most cabinets are available ex stock to meet your requirements.

10 Year Manufacturing Warranty



1800 444 022

WWW.PBASAFETY.COM.AU

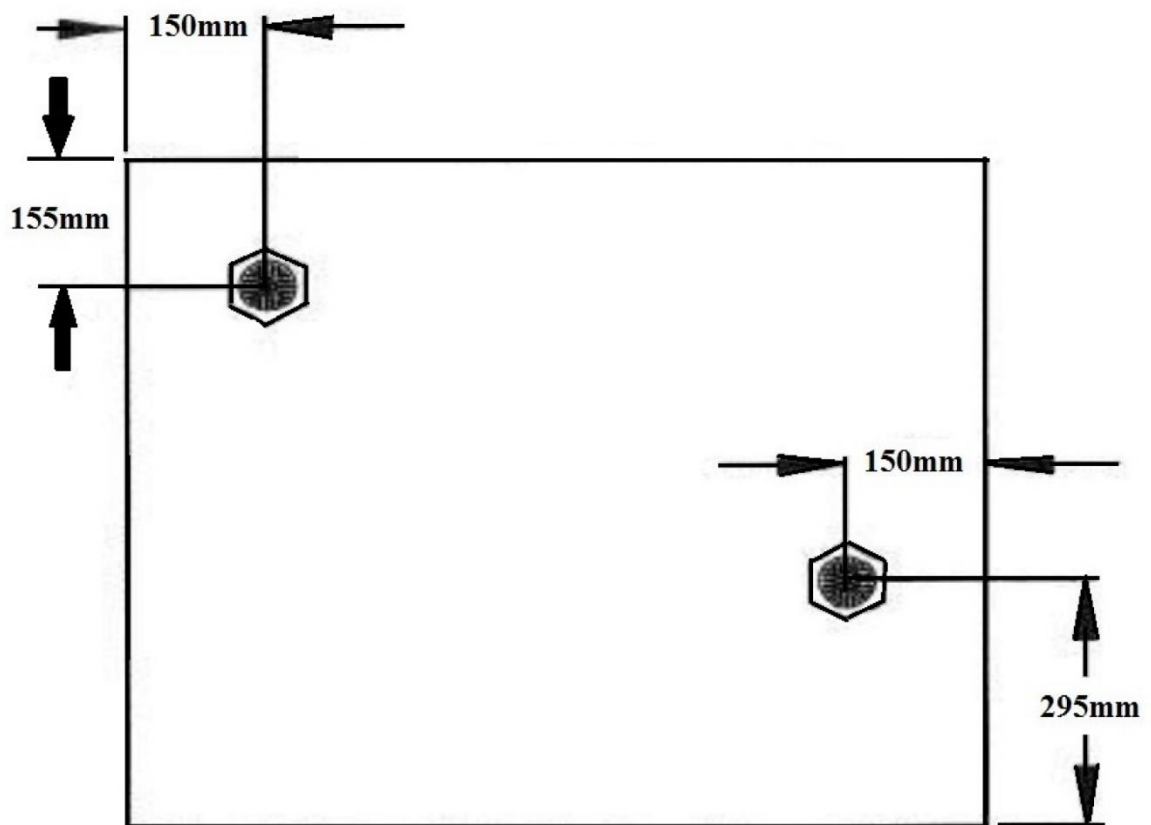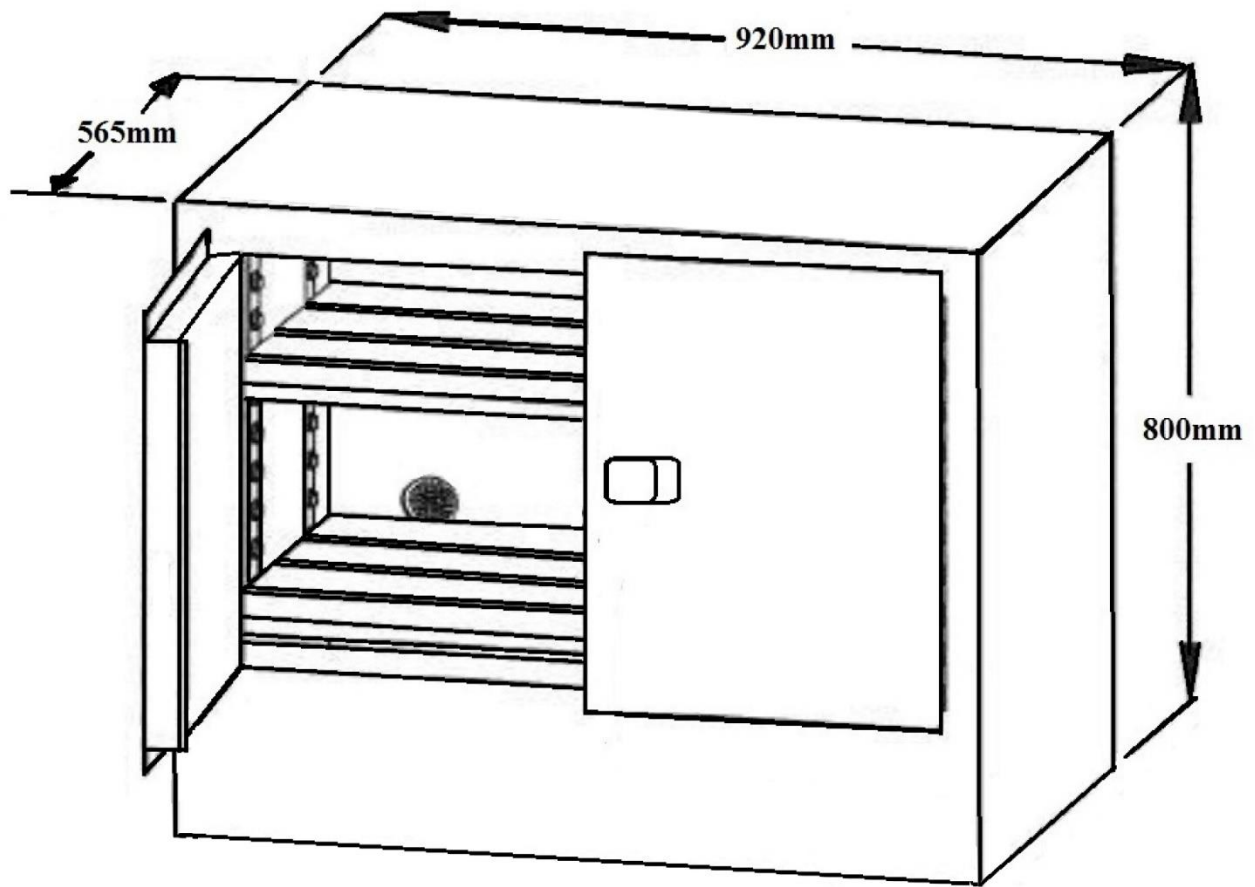



# JUSTRITE CABINETS EXCEED THE AUSTRALIAN STANDARD COMPLIANCE AS1940

Justrite cabinets: are the only cabinet that have been fire tested and rated by FM Global (Factory Mutual performance standard that is recognised by Insurance Companies)

“Something no other cabinet in Australia can claim”

During the 10 minutes test period the internal temperature shall not exceed 163 Celsius



Haz-Alert Reflective labelling provides high visibility in the dark under fire conditions or power outage when illuminated by flashlight beam. Patent Pending.

Minimal air-gaps provide better protection.

Double Wall thermal barrier 1.2mm sheet steel thickness with 40mm wall spacing.


Easy Close, Self latching doors.

Fully welded (not riveted) construction holds squareness for longer life, offering greater protection in a fire since air gaps are reduced.


Continuous piano hinges provides smooth closure.

Durable and chemical-resistant, lead-free powder-coat paint finish, inside and out, retains high gloss look and minimizes the effects of corrosion.

Exclusive U-Lock Padlockable Handle. Optional padlock allows for extra security and key-coding multiples for convenient access. Flush paddle handle with slip resistant grip offers easy fingertip operation and reduces dangerous "catches" from passing traffic. Double key set included for keyed lock. Patent Pending. Padlock not included.



Exclusive SpillSlope safety shelves directs spills to back and bottom of leak proof sump. Heavy gauge galvanised steel shelves are bi-directional and easily adjust on 76mm centres for versatile storage. Each cabinet is provided standard with 150mm deep sump to contain spills or leaks within the cabinet.



Patented concealed self-close mechanism provides obstruction free access to top shelf space. Self-indexing doors guarantee they will close in sequence and assure a tight closure from top to bottom.



Rounded safety corners on doors reduce accidental nicks or cuts and potential hand injury.

“Ask for the mark of quality”



(sample) FM Certification Decal

Dual vents with built in flame arresters strategically placed at top and opposite bottom are




Stainless Steel, three point bullet self-latching system provides easy, fail-safe, positive door closure with increased heat resistance.

Fusible links hold doors wide open and melt at (74 C) for Automatic closure.



Built in grounding connector (on outside side panel) for easy grounding.

Adjustable leveling feet for stability on uneven surfaces.



Welded shelf hangers interlock with shelf to offer maximum "no slip" stability.. And no flimsy brackets to lose.



## CABINET DIMENSIONS

| Model Number | Capacity | Shelves | Doors | External Measurement |              | Internal Measurement |              |
|--------------|----------|---------|-------|----------------------|--------------|----------------------|--------------|
|              |          |         |       | H x W x D            | H x W x D    | H x W x D            | H x W x D    |
| AU25602      | 350      | 3       | 2     | 1760                 | 870 x 870    | 1520                 | 785 x 785    |
| AU25452      | 250      | 3       | 2     | 1760                 | x 1100 x 465 | 1520                 | x 1020 x 375 |
| AU25302      | 160      | 2       | 2     | 1230                 | x 1100 x 465 | 990                  | x 1020 x 375 |
| AU25304      | 110      | 2       | 1     | 1230                 | x 670 x 465  | 990                  | x 590 x 375  |
| AU25308      | 170      | 3       | 1     | 1760                 | x 670 x 465  | 1520                 | x 590 x 375  |
| AU25744      | 50       | 1       | 2     | 745                  | x 770 x 565  | 505                  | x 710 x 485  |
| AU25748      | 100      | 2       | 2     | 800                  | x 920 x 565  | 560                  | x 830 x 480  |
| AU25712      | 60       | 2       | 1     | 1005                 | x 595 x 465  | 765                  | x 505 x 375  |
| AU25714      | 30       | 2       | 1     | 800                  | x 595 x 465  | 560                  | x 505 x 375  |
| AU25716      | 15       | 1       | 1     | 565                  | x 432 x 432  | 470                  | x 349 x 349  |
| AU25701      | 250      |         | 2     | 1760                 | x 870 x 870  | 1520                 | x 785 x 785  |
| AU25662      | 250      |         | 2     | 1385                 | x 765 x 1225 | 1145                 | x 685 x 1145 |
| AU29801CS    | 45       | 2       | 2     | 425                  | x 1092 x 457 | 310                  | x 1003 x 370 |
| AU29804SC    | 64       | 2       | 2     | 610                  | x 1092 x 457 | 485                  | x 1003 x 370 |



All models of cabinets have the same external and internal measurements for Flammable, Corrosive, Poisons, Pesticides, Oxidising Agents and Organic Peroxides cabinets. For more information on storing within the Oxidising Agent, Organic Peroxides and Pesticides cabinets please contact of customer service on 1800 444 022.